


## Masonry Boxes and Accessories

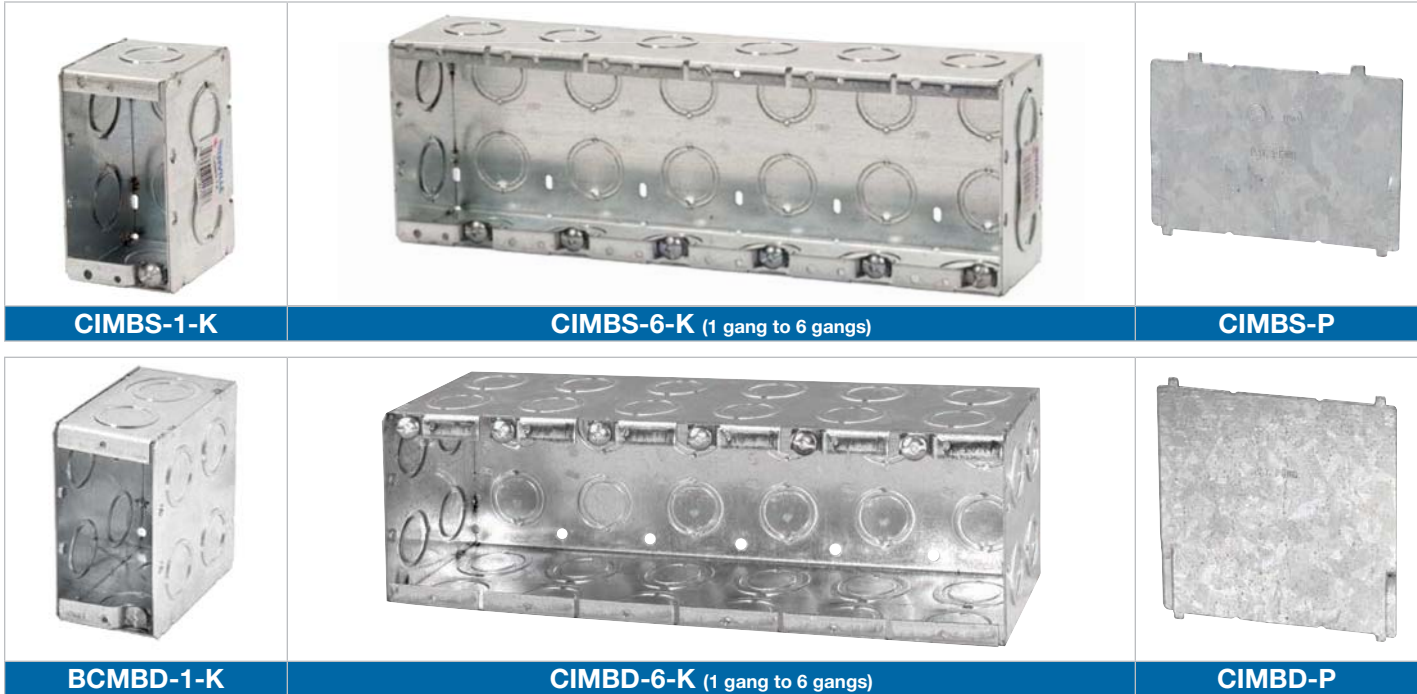

Cat. No.	Volume (Cu. in.)	Number of Gangs	Width (in.)	1/2 in. and 3/4 in. Concentric Knockouts			1/2 in., 3/4 in. and 1 in. Concentric KOs (ends)
				sides	bottom	ends	
<b>2-1/2 in. Deep x 3-3/4 in. High</b>							
<b>CIMBS-1-K</b>	14.0	1	2	4	2	2	-
<b>CIMBS-2-K</b>	28.0	2	3-25/32	4	4	4	-
<b>CIMBS-3-K</b>	42.0	3	5-19/32	4	6	6	-
<b>CIMBS-4-K</b>	56.0	4	7-13/32	4	8	8	-
<b>CIMBS-5-K</b>	70.0	5	9-7/32	4	10	10	-
<b>CIMBS-6-K</b>	84.0	6	11-1/32	4	12	12	-
<b>3-1/2 in. Deep x 3-3/4 in. High</b>							
<b>BCMBD-1-K</b>	21.0	1	2	8	2	3	1
<b>CIMBD-2-K</b>	42.0	2	3-25/32	8	4	6	2
<b>CIMBD-3-K</b>	63.0	3	5-19/32	8	6	9	3
<b>CIMBD-4-K</b>	84.0	4	7-13/32	8	8	12	4
<b>CIMBD-5-K</b>	105.0	5	9-7/32	8	10	15	-
<b>CIMBD-6-K</b>	126.0	6	11-1/32	8	12	18	-

Note: On multi-gang boxes, lateral spacing between mounting holes is 1-13/16 in.

Cat. No.	Description
<b>Accessories</b>	
<b>CIMBS-P</b>	Steel partition for MBS 2-1/2 in. deep masonry boxes
<b>CIMBD-P</b>	Steel partition for MBD 3-1/2 in. deep masonry boxes

In accordance with C.E.C. 2012 Edition, Rule 12-3030: Conductors that are connected to different power or distribution transformers or other different sources of voltage shall not be installed in the same box, cabinet, or fitting unless a barrier of sheet steel not less than 1.3 mm thick or a flame-retardant nonmetallic insulating material not less than 1.6 mm in thickness is used to divide the space into separate compartments for the conductors of each system.