

Jazz



INSTALLATION AND CONNECTION

Installation height 39 3/8 in (100 cm).

Clearances


■ Front: 20 in (50 cm) ◀ Sides: 6 in (15 cm) ▲ Above: 12 in (30 cm).

Installation Quick-mounted surface installation with easy snap-on bracket.

Connection 240-V unit: Flexible cord connection, including junction box. Installation requires 2 in X 3 in wall box (not included).


120-V unit: Plug-in connection with 6 ft flexible cord.


Note 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

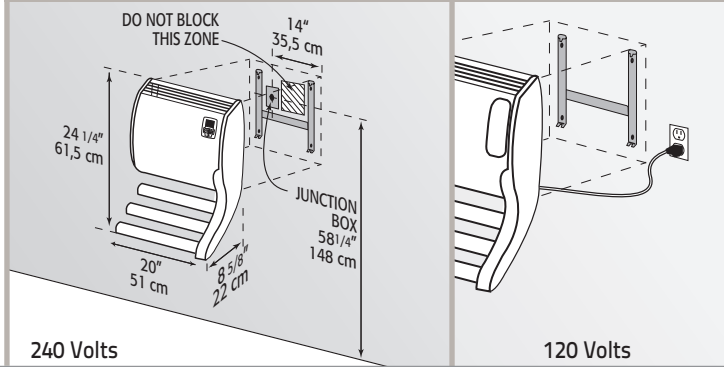

HEATING ELEMENT

Total capacity 1500 (120V) or 2000W (240V)

 **Convection (750 (120V) or 1 000 W (240V))** X-shaped, monoblock element made of surface-treated extruded aluminum.

 **Fan-forced heat on demand and towel drying (750 (120V) or 1 000 W (240V))** Low-thermal-mass heating element combined with low-pressure tangential blower.

Thermal protection - Convection Automatic reset overheat protection.

- **Fan-forced heat** Resetable overheat protection. Reset by turning heater off.

TEMPERATURE CONTROL

 **Electronic thermostat** Built-in electronic proportional-action thermostat ultraprecise to 1/5 °F (1/10 °C) for convection heating.

Electronic timer with indicator light, for 5 to 90 minutes of accelerated heating.

Programmer Programmer-compatible, pilot wire only (240-V unit).

CONTROL PANEL

 **Location** Front panel.

LCD screen Back-lit with controls lockable by key combination.

On/Off button with indicator light.

Timer button with indicator light.

24-hr button with indicator light stores the Chrono setting, for daily bathroom preheating.

<< + and - >> buttons control the temperature setting.

Locked indicator light.

Heating indicator light.



CABINET

 **Steel** construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.

Cabinet Splash-proof construction with rounded edges and built-in side wire covers.

Louvres Top forward-louvered air outlet that directs heat towards the entire room.

Colour BB = White

MODEL	Catalogue No.	Colour	Power		Height		Width		Depth		Net Weight	
			240 V	208 V	cm	in	cm	in	cm	in	kg	lb
JAZZ ②	7618-C20	BB	*1000 - 2000 W		61,5	24 1/4	51	20	22	8 5/8	8,5	18,7
*Convection (1000 W); Fan-forced heat (1000 W)												
120 VOLTS   PLUG-IN												
JAZZ ④	7618-B15	BB	*750 - 1500 W		61,5	24 1/4	51	20	22	8 5/8	8,5	18,7
*Convection (750 W); Fan-forced heat (750 W)												

② Compatible with the Programmer system (see technical specifications for catalogue number 7392).

④ Not compatible with the Programmer system. For use with 120 V outlets.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor. Consult **convectair.com** to find the most recent installation instructions for our heaters.

