



UCP-LED

DIMMABLE



- EACH UNIT INCLUDES:**
- 1 - Puck Light
 - 1 - Cable Connector
 - 1 - Mounting screw
 - 1 - 6" Male-to-Male Connector



- NATURAL WHITE (4000K)**
or
WARM WHITE (3000K)

** Power Supply and accessories sold separately (see back)*

DESCRIPTION

Pucklights can be combined with UC/UCT linear models.
 Available in Natural White (NW-4000K) or Warm White (WW-3000K)
 LEDs have a greater than 50,000 hour life
 Easy installation – Hardwire or plug-in power supply required. (see back)
 Dimming option available when using a standard TRIAC dimmer and hardwire installation. If using a plug-in power supply, a separate dimmer controller is available
 Voltage 24DC

APPLICATION

*Ideal for smaller areas:
 under cabinets, shelving,
 bookcases, walls and
 task lighting*

Installation and ordering information on reverse.


¹ Available separately.

LED

LED Undercabinet Ultra Thin Puck Light



INSTALLATION DIAGRAM

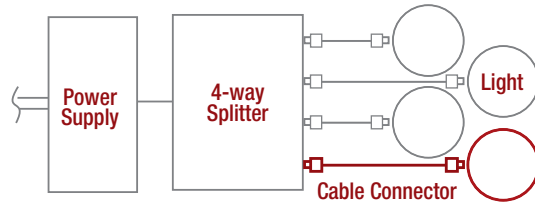

POWER SUPPLY REQUIREMENT

PRODUCT	# PIECES		WATTAGE		TOTAL WATTAGE
UCP-LED		x	3 Watts	=	

*** IMPORTANT ***
EACH SERIES RUN
MUST NOT EXCEED
36WATTS

ORDERING INFO

PRODUCT	PROD#	DESCRIPTION	WATT	DIMENSIONS
Natural White Unit * 4000K	88897	UCP-LED-NW	3W	D-90mm x H-6mm
Warm White Unit * 3000K	88896	UCP-LED-WW	3W	D-90mm x H-6mm
Plug-in Power Supply	88864	UC-6W Power Supply	6W	L-45mm x W-25mm x D-31mm
	88865	UC-12W Power Supply	12W	L-68mm x W-25mm x D-50mm
	88866	UC-24W Power Supply	24W	L-96mm x W-30mm x D-45mm
	88867	UC-36W Power Supply	36W	L-96mm x W-30mm x D-45mm
Hardwire Power Supply	88860	UC-40W Hardwire Kit	40W	L-142.8mm x W-54.3mm x D-53.9mm
	88859	UC-H/W 100W ²	100W	
	88857	UC-H/W 150W ²	150W	
Dimmer (for plug-in power supply)	88872	UC-Dimmer Controller		L-85mm x W-25.4mm x D-12.7mm
On/Off Switch	88871	UC-Switch Connector		L-33mm x W-33mm x D-8mm
Output Receptacle (splitter)	88873	UC RCPT DC 4 (Allows you to split the low voltage power into 4 separate runs)		
	88874	UC RCPT DC 8 (Allows you to split the low voltage power into 8 separate runs)		

* EACH UNIT INCLUDES: (1) puck light, (1) cable connector, (1) male-to-male connector and (1) screw

² For use with multiple run applications. Output receptacle (splitter) is required to tie in runs to 100W or 150W transformer



Visit rabdesign.ca to view our entire collection.

RAB Design Lighting Inc. 222 Islington Ave., Toronto, ON M8V 3W7
TEL. 416-252-9454 / 800-268-0381 | FAX. 416-252-9664 / 800-668-5517

