


**Product datasheet**  
Characteristics

**8910DPA52V14**  
CONTACTOR 600VAC 50AMP DPA +OPTIONS

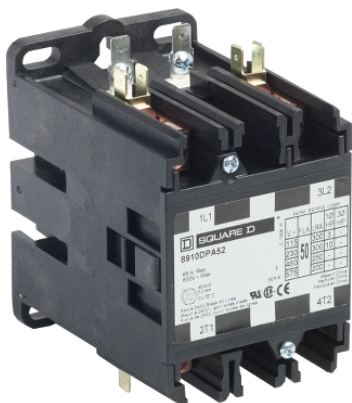

**Main**

Product or component type	Definite Purpose Contactor
[In] rated current	50 A
Poles description	2P
Pole contact composition	2 NO
Range of product	DPA

**Complementary**

Motor power hp	3 hp 115 V AC 1 phase 10 hp 230 V AC 1 phase
Locked rotor rated current	250 A 460 V AC 200 A 575 V AC 300 A 277 V AC
[Ue] rated operational voltage	600 V AC
[Uc] control circuit voltage	24 V AC 50/60 Hz
Network number of phases	1 phase
Electrical connection	Quick connect terminals Box lugs

**Environment**

product certifications	CE CSA UL listed
------------------------	------------------------

**Offer Sustainability**

Sustainable offer status	Not Green Premium product
RoHS (date code: YYWW)	Compliant - since 1140 - Schneider Electric declaration of conformity

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.