

ZBRA2

passive antenna for zbrn1 & zbrn2



Main

Range of product	Harmony XB5R
Product or component type	Wireless and batteryless range
Device short name	ZBRA
Product destination	Wireless access point
Colour of base of enclosure	Black RAL 9011

Complementary

Communication port protocol	Zigbee green power at 2.4 GHz conforming to IEEE 802.15.4
Kit composition	Antenna with cable 2 m
Input impedance	50 Ohm
Connector type	MCX female
Antenna gain	> 3 dBi 83...100 Hz
Maximum sensing distance	100 m access point in free field
Product weight	0.04 kg

Environment


relative humidity	90 % at -20...55 °C without condensation conforming to ETSI EN 300 440-1
electrical shock protection class	Class II conforming to IEC 61140

Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 1402 - Schneider Electric declaration of conformity
REACH	Reference not containing SVHC above the threshold
Product environmental profile	Available
Product end of life instructions	Available

Clearances

Maximum Distance between Transmitter and the Access Point in a Metal Enclosure with an External Antenna

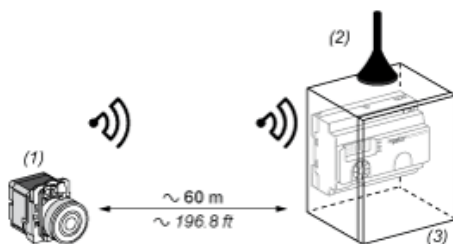

- (1) Transmitter
- (2) External Antenna
- (3) Access Point in a Metal enclosure

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

The range is reduced if the transmitter is placed in a metal enclosure (reduction factor : approx 10%)

Glass window	10...20 %
Plaster wall	30...45 %
Brick wall	60 %
Concrete wall	70...80 %
Metal structure	50...100 %