

**Installation height** 6 in (15 cm).


### Clearances

■ Front: 30 in (75 cm) ◀ Sides: 8 in (20 cm) ▲ Above: 8 in (20 cm).

**Installation** Quick-mounted surface installation with easy snap-on bracket that also serves as marking template.


**Connection** 240-V unit: Flexible cord connection, including junction box cover. Installation requires 2 in X 3 in wall box (not included).

**Note** 3-conductor cable or 2-conductor cable with a third wire should be used if unit is to be linked with the Convectair Programmer module (7392 FP).

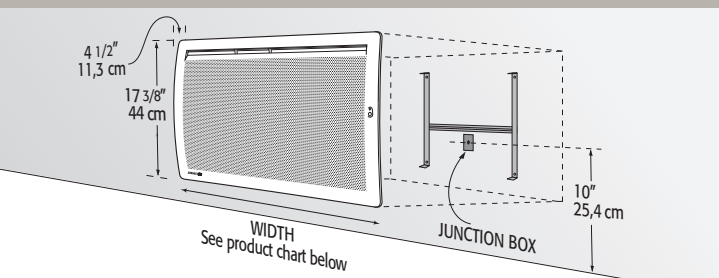

## HEATING ELEMENT

**Total capacity** 500, 1 000, 1 500 and 2 000 W

 **Radiant heat** Ribbed-high-emissivity monoblock element made of aluminum alloy.

**Thermal protection** Automatic reset overheat protection.

## TEMPERATURE CONTROL

 **Electronic thermostat** Built-in electronic proportional-action thermostat ultraprecise to 1/5°F (1/10°C).

**Programmer Control** panel designed to accept the 7392 Programmer module.

## CONTROL PANEL



**Location** On top right-hand side of the unit, with lockable protective cover.

**Energy use** indicator.

**LCD screen** with digital controls lockable by key combination.

**On/Off button** with indicator light.

**Mode button** with five settings: Comfort; Economy; Frost protection (45°F (7°C)); Program (automatic setback when connected to the Convectair Programmer); Absence detector (setback when absence detected).

**Open-window button** to activate open-window detection.

**Ideal °C button** optimizes energy consumption and restores default settings.

**<< + and - >> buttons** set the temperature and lock the controls.

**Heating** indicator light.

## CABINET



**Steel** construction with polyester/epoxy anti-rust powder coating and resistant to UV rays.

**Cabinet** Convex casing with rounded corners.

**Grille** Perforated front panel for better radiant heat with absence detector.

**Colour BB** = White

MODEL	Catalogue No.	Colour	Power		Height		Width		Depth		Net Weight	
			240 V	208 V	cm	in	cm	in	cm	in	kg	lb
OPERA 17 ② (SP)	7733-C05	BB	500	375	44	17 3/8	53,2	21	11,3	4 1/2	4,4	9,7
	7733-C10	BB	1 000	750	44	17 3/8	63,7	25	11,3	4 1/2	5,3	11,7
	7733-C15	BB	1 500	1125	44	17 3/8	84,7	33 3/8	11,3	4 1/2	7	15,4
	7733-C20	BB	2 000	1500	44	17 3/8	105,7	41 5/8	11,3	4 1/2	8,7	19,2

② Compatible with the Programmer system (see technical specifications for catalogue number 7392).

(SP) Control panel is designed to accept the 7392 Programmer module.

For guaranteed, dependable operation, we recommend that all units be installed by a licensed electrical contractor. Consult [convectair.com](http://convectair.com) to find the most recent installation instructions for our heaters.

