
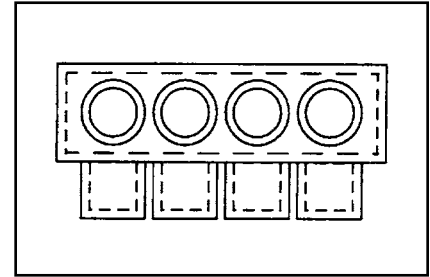


TYPE BIBS

UNITAP™

Clear Insulated Multiple Tap Connectors

Tap connections and in-line splice/reductions are made quickly and easily with the UNITAP™ line of connectors. UL486B Listed. Dual-rated AL9CU for any stranded copper or stranded aluminum applications. 600 Volt, 90° C.

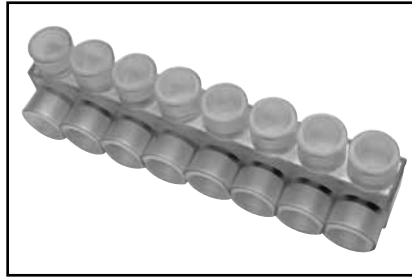

Features & Benefits

- Clear Plastisol covered AL6061-T6 aluminum body
 - ◊ Saves time, lowers installation costs, eliminates taping
- Clear Plastisol
 - ◊ Allows visual confirmation that conductor is properly inserted
- Oxide inhibitor pre-installed
 - ◊ Inhibits moisture and contaminants from entering the contact area
- Range-taking
 - ◊ Reduces number of connectors carried in inventory

MULTI-PORT Single-Sided Entry

| Catalog Number | # of Ports | Wire Range (AWG/kcmil) | L | W | H | Hex Key |
|----------------|------------|------------------------|-------|------|------|---------|
| BIBS4-3 | 3 | 14 AWG-4 AWG | 1.51 | 1.25 | 1.25 | 1/8 |
| BIBS4-4 | 4 | 14 AWG-4 AWG | 1.95 | 1.25 | 1.25 | 1/8 |
| BIBS4-5 | 5 | 14 AWG-4 AWG | 2.39 | 1.25 | 1.25 | 1/8 |
| BIBS4-6 | 6 | 14 AWG-4 AWG | 2.83 | 1.25 | 1.25 | 1/8 |
| BIBS4-8 | 8 | 14 AWG-4 AWG | 3.71 | 1.25 | 1.25 | 1/8 |
| BIBS2/0-3 | 3 | 14 AWG-2/0 Str | 2.19 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-4 | 4 | 14 AWG-2/0 Str | 2.86 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-5 | 5 | 14 AWG-2/0 Str | 3.53 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-6 | 6 | 14 AWG-2/0 Str | 4.20 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-8 | 8 | 14 AWG-2/0 Str | 5.55 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-10 | 10 | 14 AWG-2/0 Str | 6.89 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-12 | 12 | 14 AWG-2/0 Str | 8.24 | 1.31 | 1.38 | 3/16 |
| BIBS2/0-14 | 14 | 14 AWG-2/0 Str | 9.58 | 1.31 | 1.38 | 3/16 |
| BIBS250-3 | 3 | 10 AWG-250 kcmil | 2.97 | 2.07 | 2.13 | 5/16 |
| BIBS250-4 | 4 | 10 AWG-250 kcmil | 3.91 | 2.07 | 2.13 | 5/16 |
| BIBS250-5 | 5 | 10 AWG-250 kcmil | 4.84 | 2.07 | 2.13 | 5/16 |
| BIBS250-6 | 6 | 10 AWG-250 kcmil | 5.78 | 2.07 | 2.13 | 5/16 |
| BIBS250-8 | 8 | 10 AWG-250 kcmil | 7.66 | 2.07 | 2.13 | 5/16 |
| BIBS250-10 | 10 | 10 AWG-250 kcmil | 9.53 | 2.07 | 2.13 | 5/16 |
| BIBS250-12 | 12 | 10 AWG-250 kcmil | 11.41 | 2.07 | 2.13 | 5/16 |
| BIBS250-14 | 14 | 10 AWG-250 kcmil | 13.29 | 2.07 | 2.13 | 5/16 |
| BIBS350-3 | 3 | 10 AWG-350 kcmil | 3.13 | 2.32 | 2.50 | 5/16 |
| BIBS350-4 | 4 | 10 AWG-350 kcmil | 4.04 | 2.32 | 2.50 | 5/16 |
| BIBS350-5 | 5 | 10 AWG-350 kcmil | 4.95 | 2.32 | 2.50 | 5/16 |
| BIBS350-6 | 6 | 10 AWG-350 kcmil | 5.86 | 2.32 | 2.50 | 5/16 |
| BIBS350-8 | 8 | 10 AWG-350 kcmil | 7.68 | 2.32 | 2.50 | 5/16 |
| BIBS350-10 | 10 | 10 AWG-350 kcmil | 9.50 | 2.32 | 2.50 | 5/16 |

| Catalog Number | # of Ports | Wire Range (AWG/kcmil) | L | W | H | Hex Key |
|----------------|------------|------------------------|-------|------|------|---------|
| BIBS350-12 | 12 | 10 AWG-350 kcmil | 11.32 | 2.32 | 2.50 | 5/16 |
| BIBS350-14 | 14 | 10 AWG-350 kcmil | 13.14 | 2.32 | 2.50 | 5/16 |
| BIBS600-3 | 3 | 4 AWG-600 kcmil | 4.00 | 2.38 | 2.75 | 3/8 |
| BIBS600-4 | 4 | 4 AWG-600 kcmil | 5.28 | 2.38 | 2.75 | 3/8 |
| BIBS600-5 | 5 | 4 AWG-600 kcmil | 6.56 | 2.38 | 2.75 | 3/8 |
| BIBS600-6 | 6 | 4 AWG-600 kcmil | 7.84 | 2.38 | 2.75 | 3/8 |
| BIBS600-8 | 8 | 4 AWG-600 kcmil | 10.41 | 2.38 | 2.75 | 3/8 |
| BIBS600-10 | 10 | 4 AWG-600 kcmil | 12.97 | 2.38 | 2.75 | 3/8 |
| BIBS600-12 | 12 | 4 AWG-600 kcmil | 15.53 | 2.38 | 2.75 | 3/8 |
| BIBS600-14 | 14 | 4 AWG-600 kcmil | 18.09 | 2.38 | 2.75 | 3/8 |
| BIBS750-3* | 3 | 2 AWG-750 kcmil | 4.00 | 2.70 | 3.00 | 3/8 |
| BIBS750-4* | 4 | 2 AWG-750 kcmil | 5.38 | 2.70 | 3.00 | 3/8 |
| BIBS750-6* | 6 | 2 AWG-750 kcmil | 8.13 | 2.70 | 3.00 | 3/8 |
| BIBS750-8* | 8 | 2 AWG-750 kcmil | 10.88 | 2.70 | 3.00 | 3/8 |
| BIBS750-10* | 10 | 2 AWG-750 kcmil | 13.63 | 2.70 | 3.00 | 3/8 |
| BIBS750-12* | 12 | 2 AWG-750 kcmil | 16.38 | 2.70 | 3.00 | 3/8 |
| BIBS750-14* | 14 | 2 AWG-750 kcmil | 19.13 | 2.70 | 3.00 | 3/8 |

NOTE: Only 1 conductor per port allowed.
 * Not UL Listed.
 UNITAP™ rated for code conductor only.

Blue highlighted items are industry standard and most frequently ordered.